

FLAT TOP

1800 x 950 Single Gate

IDEAL FOR RESIDENTIAL FENCING,
BRICK PIER INFILLS & MORE!

Gate Specs

- 40 x 40 x 1.6 mm SHS Stiles
- 38 x 25 x 1.6 mm RHS Rails
- 19 x 1.2 mm CHS Pickets

Picket Spacing

- 100mm Centres | 81mm Airspace

Material & Welds

- Galvanised Steel
- 2x 8mm Welds at Each Joint

Standards

- Australian Pool Safety Standard AS1926.1 (2012)
- Powder Coating Standard AS4506-2005

Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 10 year Warranty Powder


Warranty

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

Colours




**Custom powder coat colours available on special order.*

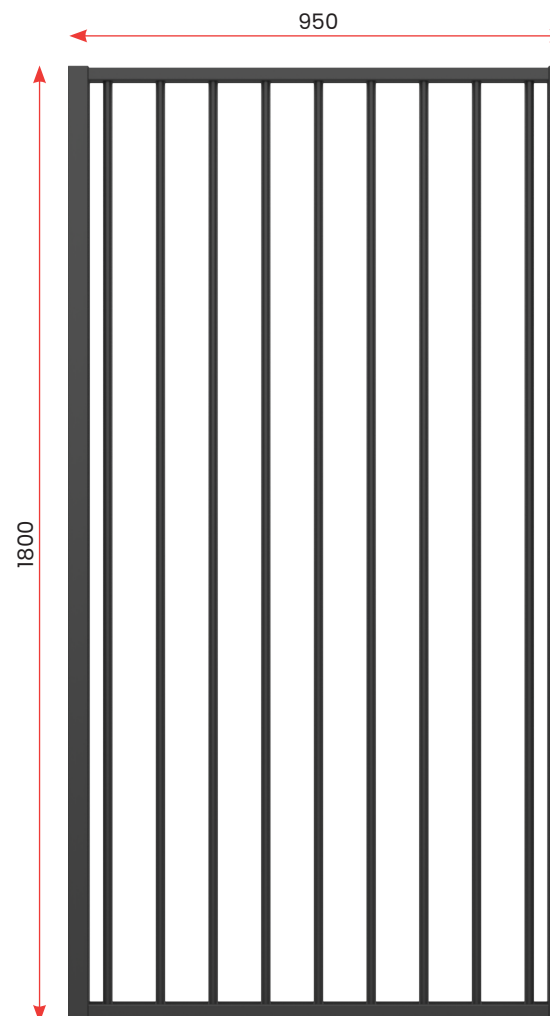


PICKET TOP DETAILS

Single Punched Top Rail with Picket Welded on Bottom Side of the Rail

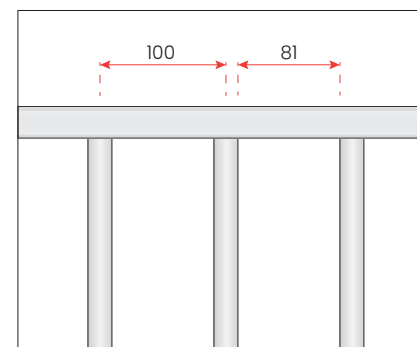

PICKET SPACING

100mm Centres | 81mm Airspace

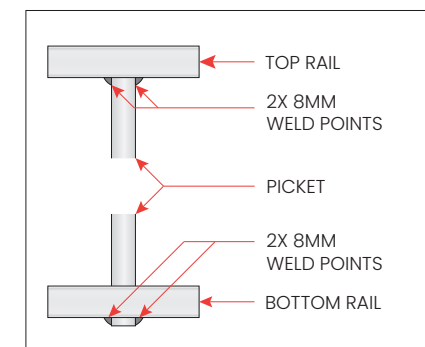

JOINT DETAILS

Each Picket Welded to Rails with 2x 8mm Welds

FLAT TOP

1800 x 950 Single Gate

IDEAL FOR RESIDENTIAL FENCING,
BRICK PIER INFILLS & MORE!

Gate Specs

- 40 x 40 x 1.6 mm SHS Stiles
- 38 x 25 x 1.6 mm RHS Rails
- 19 x 1.2 mm CHS Pickets

Picket Spacing

- 100mm Centres | 81mm Airspace

Standards

- Australian Pool Safety Standard AS1926.1 (2012)
- Powder Coating Standard AS4506-2005

Fence Brackets

- 38 x 25 Fence Brackets (Colour Matched) – 2 Hole Double Lugged (4 Brackets per Panel)
- 38 x 25 Adjustable Brackets (Colour Matched) – 2 Hole Single Lugged, Horizontal/Vertical Adjustable (4 Brackets per Panel)
- Colour Matched Self Tapping Screws – 12-14 x 20mm

Post Options

- SHS 65 x 1.6 mm / SHS 75 x 2 mm Anti-twist Inground Posts with Press Fit Caps
- SHS 65 x 1.6 mm / SHS 75 x 2 mm Base-plated Posts with Press Fit Caps

Gate Hardware


- D&D or Locinox Locking System
- D&D or Locinox Self Closing Hinges

Coating Systems


- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 15 year Warranty Powder

Warranties

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

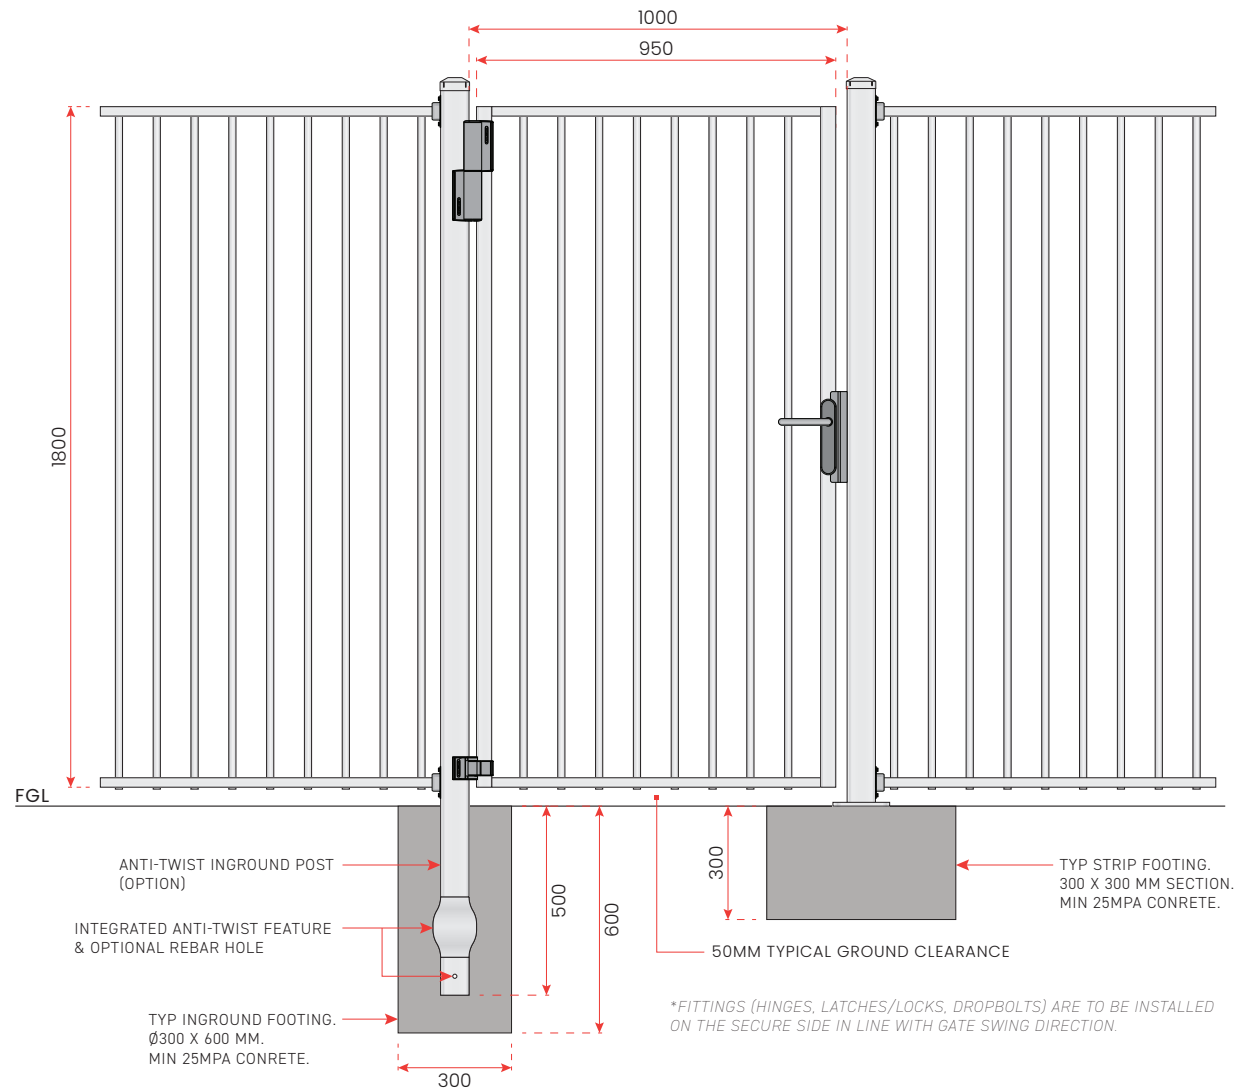


*FITTINGS (HINGES, LATCHES/LOCKS, DROPBOLTS) ARE TO BE INSTALLED ON THE SECURE SIDE IN LINE WITH GATE SWING DIRECTION.

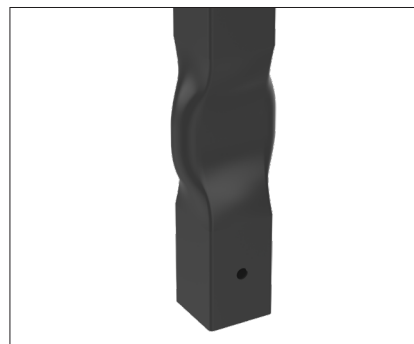

INGROUND POST ANTI-TWIST FEATURE

Inground post stamped at bottom, forming a widened section to prevent twisting

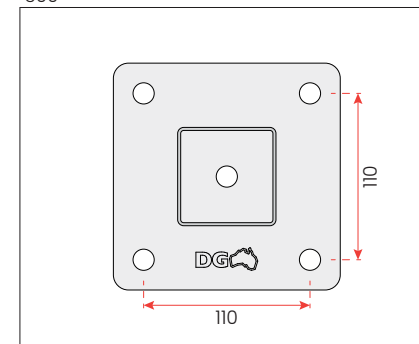

BASE PLATE DETAILS

150 X 150 base plate with Ø14mm holes in 110 x 110 hole pattern



FIXING DETAILS

4x FB3825-2H Brackets per panel, 2x TEK121420 Screws per bracket