

# LOOP TOP

## 1800 x 2300 Fence Panel

IDEAL FOR RESIDENTIAL FENCING,  
BRICK PIER INFILLS & MORE!

### Panel Specs

- 38 x 25 x 1.6 mm RHS Rails
- 19 x 1.2 mm CHS Loop Top Pickets

### Material & Welds

- Galvanised Steel
- 2x 8mm Welds at Each Joint

### Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 10 year Warranty Powder

### Warranty

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

### Colours



Black



Monument



Surfmist


*\*Custom powder coat colours available on special order.*

### Picket Spacing

- 103mm Centres | 84mm Airspace


### Standards

- Australian Pool Safety Standard AS1926.1 (2012)
- Powder Coating Standard AS4506-2005

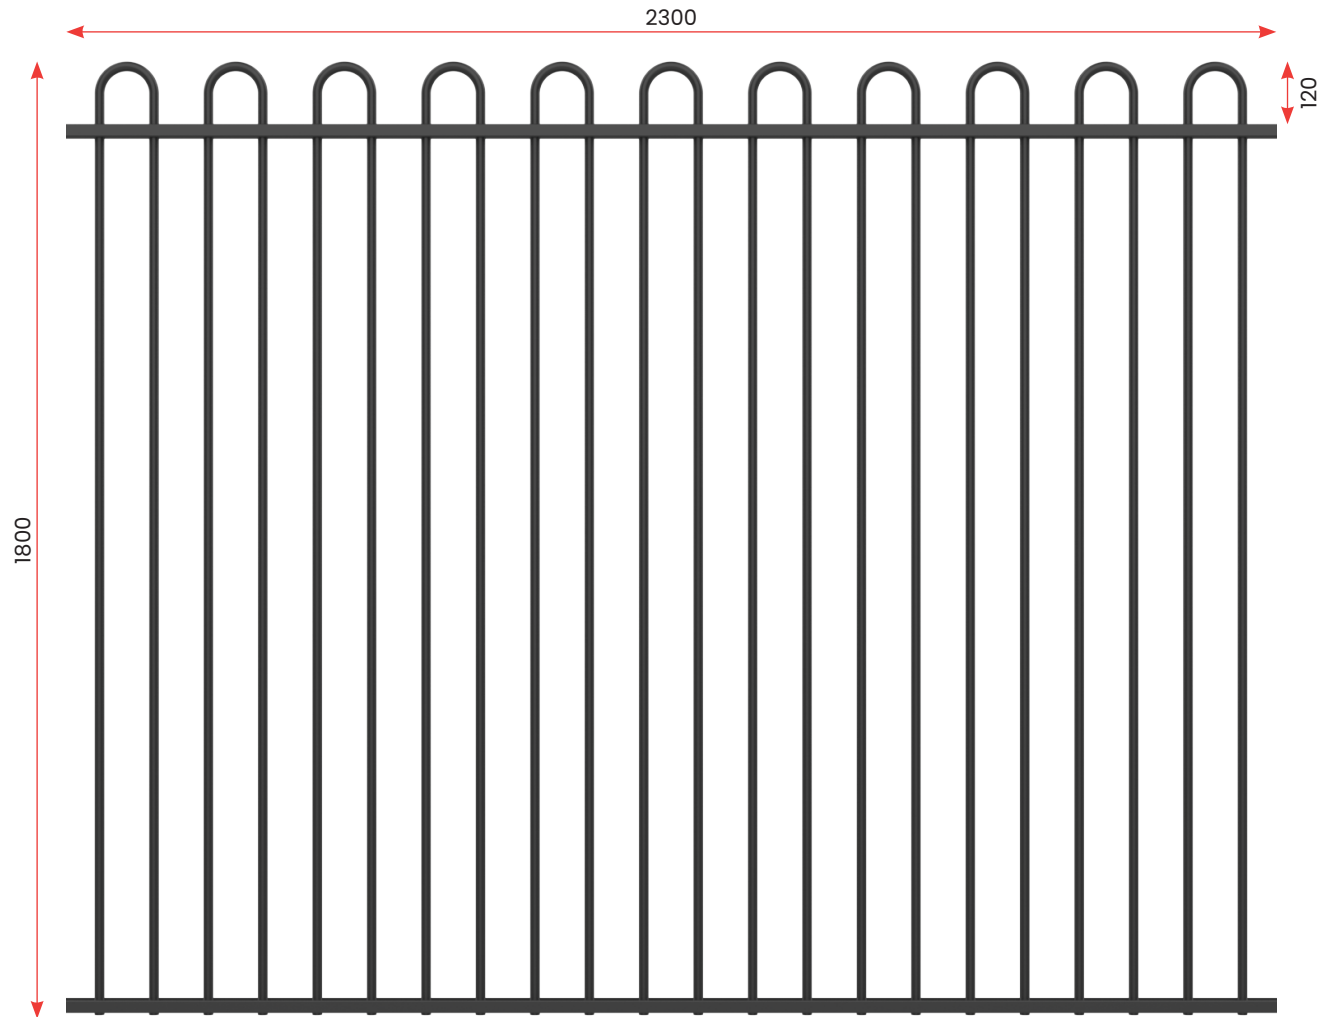


**PICKET TOP DETAILS**

Loop Top Pickets Welded on Bottom Side of the Double Punched Top Rail

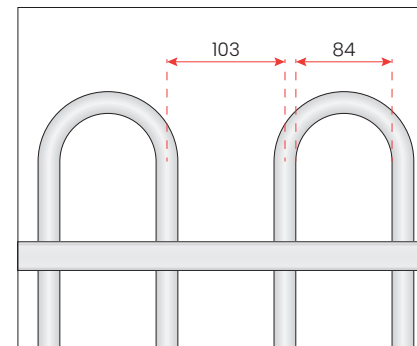

**PICKET SPACING**

103mm Centres | 84mm Airspace

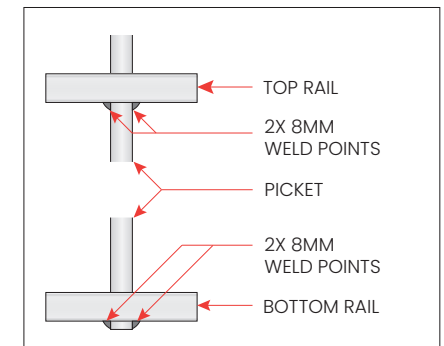

**JOINT DETAILS**

Each Picket Welded to Rails with 2x 8mm Welds

# LOOP TOP

## 1800 x 2300 Fence Panel

IDEAL FOR RESIDENTIAL FENCING,  
BRICK PIER INFILLS & MORE!

### Panel Specs

- 38 x 25 x 1.6 mm RHS Rails
- 19 x 1.2 mm CHS Loop Top Pickets

### Material & Welds

- Galvanised Steel
- 2x 8mm Welds at Each Joint

### Picket Spacing

- 103mm Centres | 84mm Airspace

### Standards

- Australian Pool Safety Standard AS1926.1 (2012)
- Powder Coating Standard AS4506-2005

### Fence Brackets

- 38 x 25 Fence Brackets (Colour Matched) – 2 Hole Double Lugged (4 Brackets per Panel)
- 38 x 25 Adjustable Brackets (Colour Matched) – 2 Hole Single Lugged, Horizontal/Vertical Adjustable (4 Brackets per Panel)
- Colour Matched Self Tapping Screws – 12-14 x 20mm

### Post Options



- SHS 65 x 1.6 mm / SHS 75 x 2 mm Anti-twist Inground Posts with Press Fit Caps
- SHS 65 x 1.6 mm / SHS 75 x 2 mm Base-plated Posts with Press Fit Caps

### Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 15 year Warranty Powder


### Warranties

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

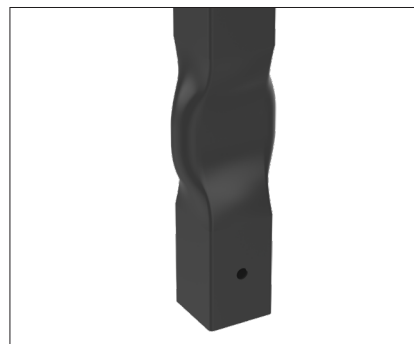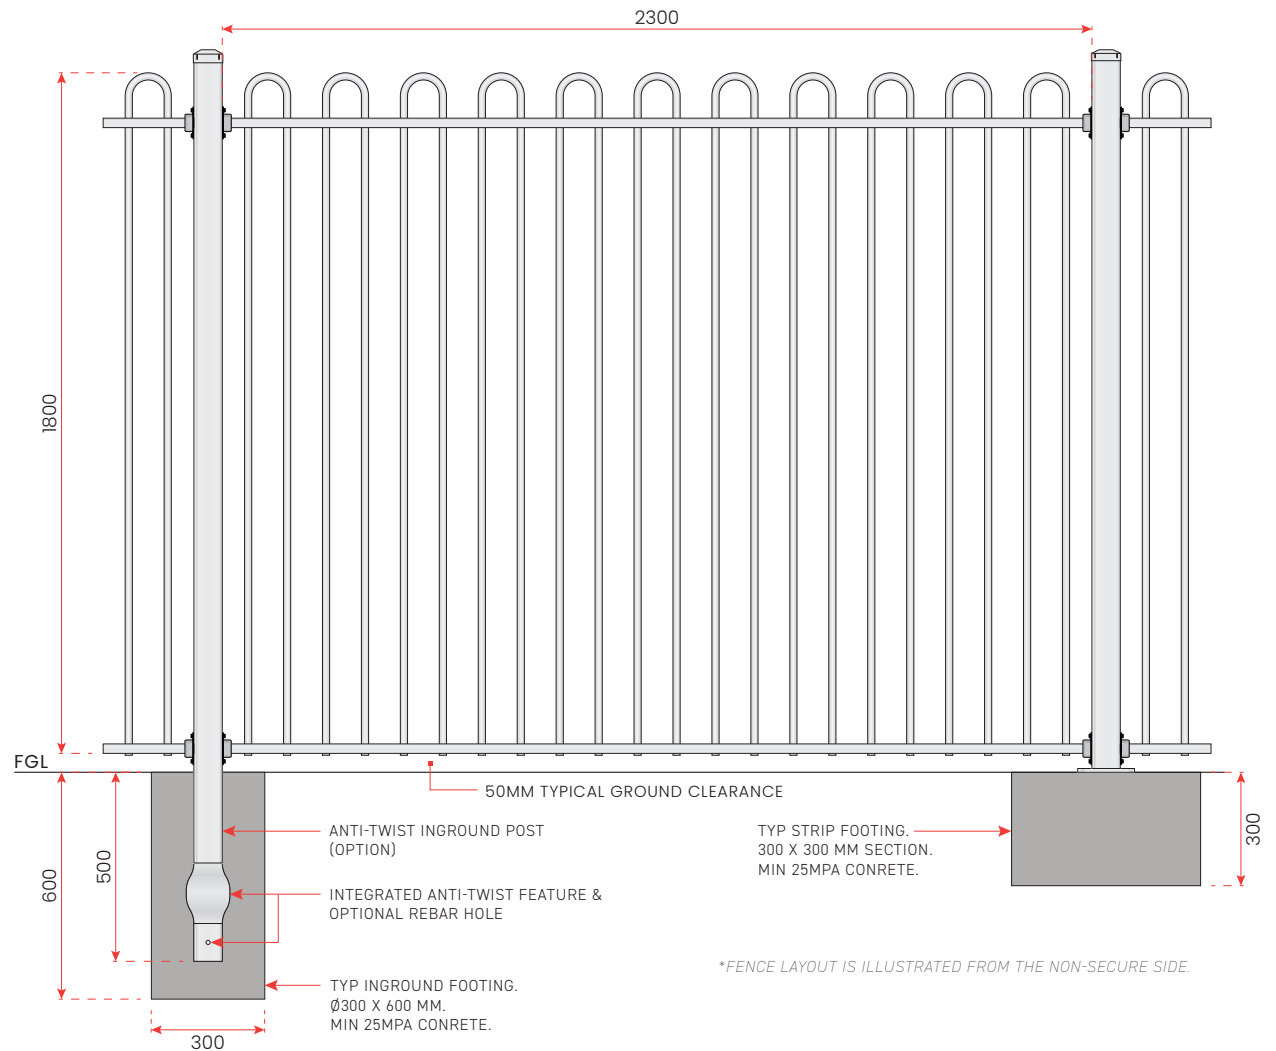

#### INGROUND POST ANTI-TWIST FEATURE

Inground post stamped at bottom, forming a widened section to prevent twisting

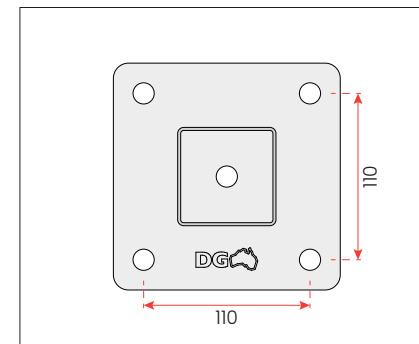

#### BASE PLATE DETAILS

150 X 150 base plate with Ø14mm holes in 110 x 110 hole pattern



#### FIXING DETAILS

4x FB3825-2H Brackets per panel, 2x TEK121420 Screws per bracket