



DOOGOOD™
Australia

Retaining Walls

CATALOGUE

DoogoodAustralia.com.au

Retaining Walls

Landscaping design should last a lifetime; if you need to control downhill erosion and create flat useable land on a sloping block nothing beats Doogood Australia's low-maintenance galvanised steel retaining wall posts and concrete sleepers.

Our retaining wall posts won't decay, warp, fade, or be susceptible to termites, and we can powder coat them in-house to match your chosen colour scheme. Doogood maintain an extensive range of heavy-duty, commercial grade hot-dipped galvanised steel for concrete and timber retaining walls. We stock industry standard sizes or can custom fabricate specialty components or lengths. We also stock a wide range of concrete sleepers to suit 100UC or 150UC gal steel posts.

Doogood's retaining wall solutions meet Australian and International Standards [AS3679.1] for durability, weld consistency, dependability, and anti-rust coating quality.

SECTION OVERVIEW



H Section Joiner Beam



90° Corner Post





T Junction




45° Corner Post



C Section End Cap

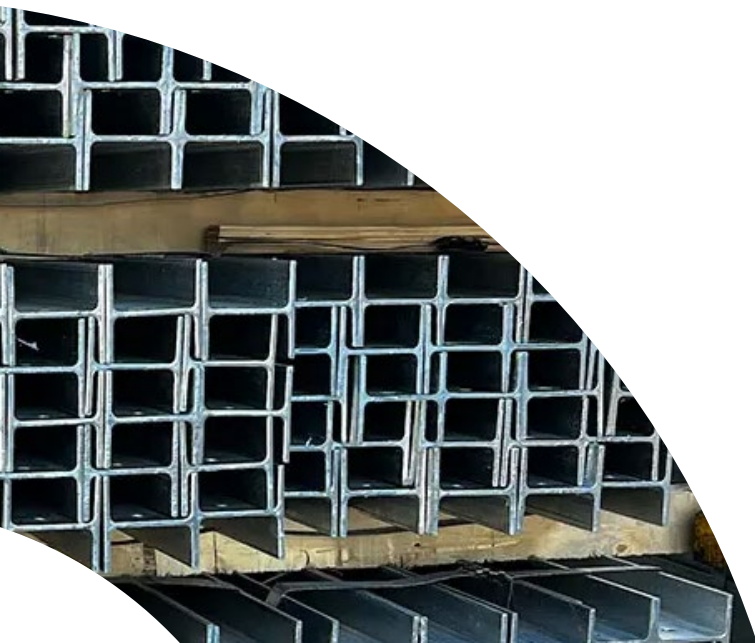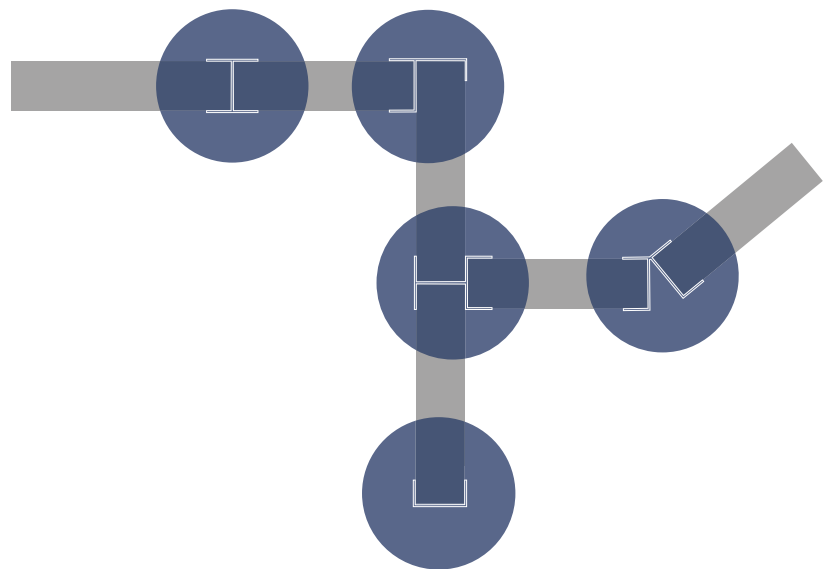


POSTS




C Section End Cap

mm	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	Steel Weight Guide Kgs/m
100	✓	✓	✓	✓	✓	✓	✓	✓	8.33
mm	2.4	3	3.5	4	4.5	4.8	6		Steel Weight Guide Kgs/m
150	✓	✓	✓	✓	✓	✓	✓		17.7




H Section Joiner Beam

mm	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	Steel Weight Guide Kgs/m
100	✓	✓	✓	✓	✓	✓	✓	✓	14.8
mm	2.4	3	3.5	4	4.5	4.8	6		Steel Weight Guide Kgs/m
150	✓	✓	✓	✓	✓	✓	✓		23




90° Corner Post

mm	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	Steel Weight Guide Kgs/m
100	✓	✓	✓	✓	✓	✓	✓	✓	16.66



T Junction

mm	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	Steel Weight Guide Kgs/m
100	✓	✓	✓	✓	✓	✓	✓	✓	23.13



45° Corner Post

mm	0.9	1.2	1.5	1.8	2.1	2.4	2.7	3.0	Steel Weight Guide Kgs/m
100	✓	✓	✓	✓	✓	✓	✓	✓	16.66

Steel Grade and Classification - relates to all sections

Mechanical Testing to AS1397-2011 for steel grade

Mechanical Properties to AS3679 - Yield strength

Galvanised Coating to AS4680 :2006 85um minimum coating thickness

Durability Classification to AS2699.3 - minimum R3 (600g/m coating mass)

Also available upon request: Full lengths 9.0m and 12m (raw and HDG) of UC , UB, EA and PFC

Leaders in Steel Fencing

Australia HQ

20 Green St,
Doveton VIC 3177

Manufacturing

Unit 5A, 28 - 30 Green St,
Doveton Vic 3177

Steel

22A Princes Hwy,
Doveton VIC 3177

DoogoodAustralia.com.au

sales@doogoodaustralia.com.au
1300 123 342



Disclaimer: Drawings not to scale. While all care is taken in the production of this Product Catalogue, elements of it are provided as indicative guides only. Doogood Australia is not liable or responsible for the outcome of any installation using these guides. Doogood Australia do not provide engineering advice on any installation situation and it is the installer's responsibility to seek any compliance and/or certification where required. All rights reserved in relation to this matter. © Copyright 2025