

BLADE FENCE

1800 x 950 Single Gate

IDEAL FOR RESIDENTIAL FENCING,
BRICK PIER INFILLS & MORE!

Gate Specs

- 50 x 50 x 1.8 mm SHS Stiles
- 40 x 40 x 1.8 mm SHS Rails
- 65 x 16 x 1.2 mm SHS Pickets

Picket Spacing

- 85mm Centres | 69mm Airspace

Standards

- Australian Pool Safety Standard AS1926.1 (2012)
- Powder Coating Standard AS4506-2005

Fence Brackets

- 40 x 40 Fence Brackets (Colour Matched) - 4 Hole, Double Lugged (4 Brackets per Panel)
- 40 x 40 Adjustable Brackets (Colour Matched) - 2 Hole, Single Lugged, Horizontal/Vertical Adjustable (4 Brackets per Panel)
- Colour Matched Self Tapping Screws - 12-14 x 20mm

Post Options

- SHS 75 x 2 mm / SHS 100 x 2 mm Anti-twist Inground Posts with Press Fit Caps
- SHS 75 x 2 mm / SHS 100 x 2 mm Base-plated Posts with Press Fit Caps

Gate Hardware



- D&D or Locinox Locking System
- D&D or Locinox Self Closing Hinges

Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 15 year Warranty Powder


Warranties

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

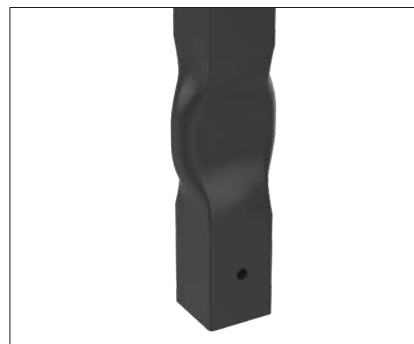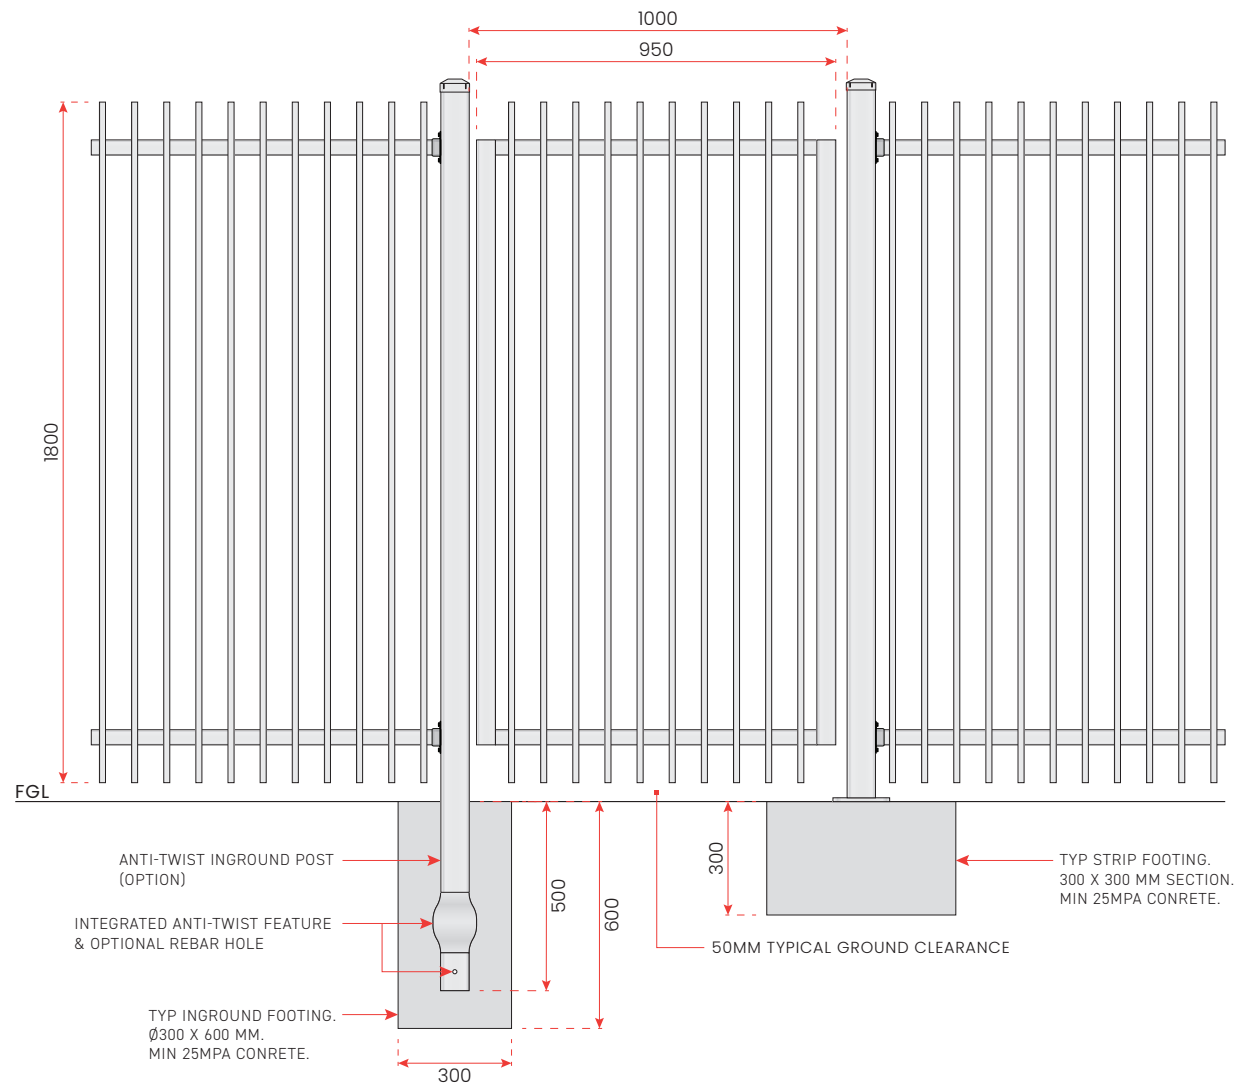


INGROUND POST ANTI-TWIST FEATURE

Inground post stamped at bottom, forming a widened section to prevent twisting

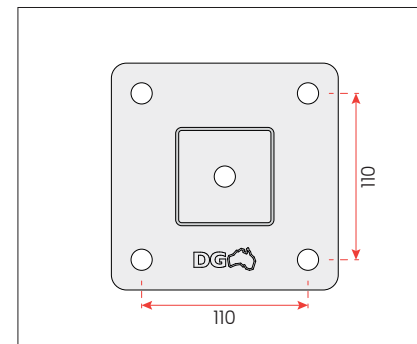

BASE PLATE DETAILS

150 X 150 base plate with Ø14mm holes in 110 x 110 hole pattern

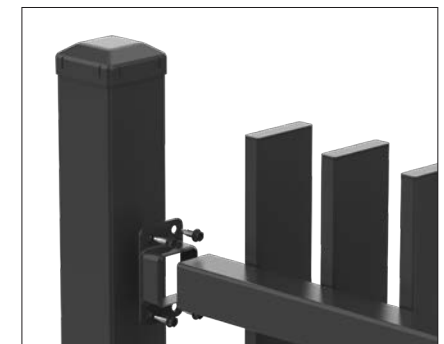

FIXING DETAILS

4x FB4040-4H Brackets per panel, 4x TEK121420 Screws per bracket