

INDUSTRIAL SQUARE TOP

2100 x 2400 Fence Panel

Panel Specs

- 40 x 40 x 1.2 mm SHS Rails
- 25 x 25 x 0.8 mm SHS Pickets

Picket Spacing

- 138mm Centres
- 113mm Airspace

Material & Welds

- Galvanised Steel
- 2x 15mm Welds at Each Joint

Standards

- Powder Coating Standard AS4506-2005

Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 10 year Warranty Powder


Warranty

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure


Colours

- Satin Black


**Custom powder coat colours available on special order.*

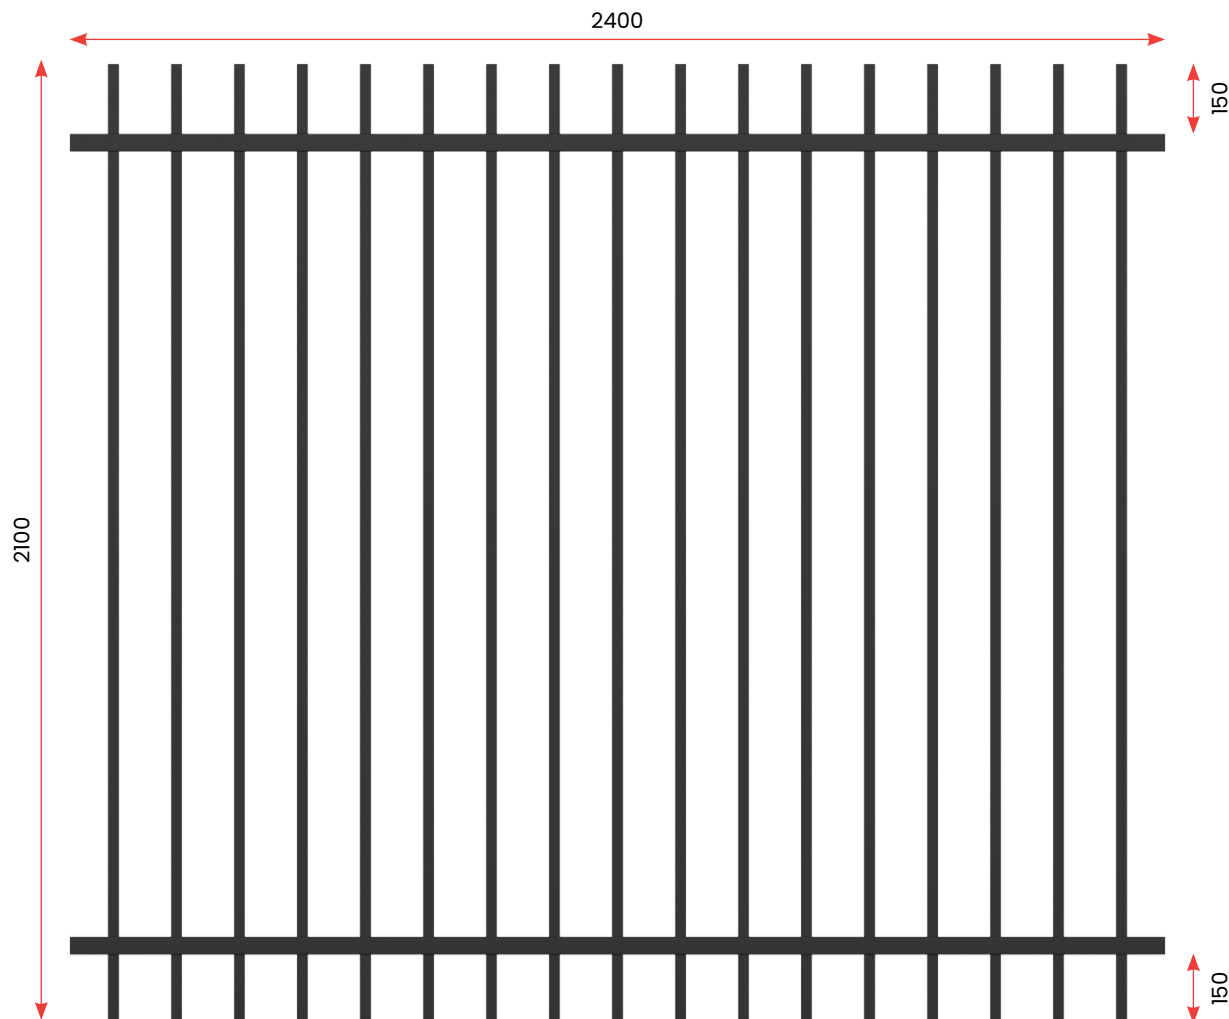

PICKET CAP DETAILS
25 x 25 mm Plastic Cap

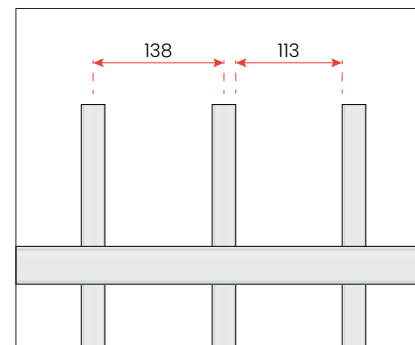

PICKET SPACING
138mm Centres | 113mm Airspace

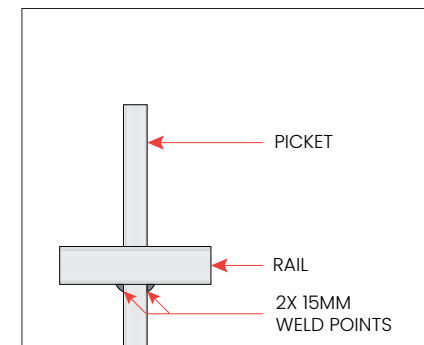

JOINT DETAILS
Each Picket Welded to Rails with 2x 15mm Welds

INDUSTRIAL SQUARE TOP

2100 x 2400 Fence Panel

Panel Specs

- 40 x 40 x 1.2 mm SHS Rails
- 25 x 25 x 0.8 mm SHS Pickets

Picket Spacing

- 138mm Centres
- 113mm Airspace

Material & Welds

- Galvanised Steel
- 2x 15mm Welds at Each Joint

Standards

- Powder Coating Standard AS4506-2005

Fence Brackets

- 40 x 40 Fence Brackets (Colour Matched) - 2 Hole Double Lugged, 4 Hole Double Lugged, (4 Brackets per Panel)
- 40 x 40 Security Brackets (Colour Matched) - Rakeable (4 Brackets per Panel)
- Colour Matched Self Tapping Screws - 12-14 x 20mm

Post Options


- SHS 65 x 2 mm / 75 x 2 mm Anti-twist Inground Posts with Press Fit Caps
- SHS 65 x 2 mm / 75 x 2 mm Base-plated Posts with Press Fit Caps

Coating Systems

- Bonderite M-NT: Nano Ceramic Coating
- Interpon or PPG 10 year Warranty Powder


Warranty

- 10-year warranty on powder coating with cleaning procedure
- 25-year lifetime recommendation with cleaning procedure

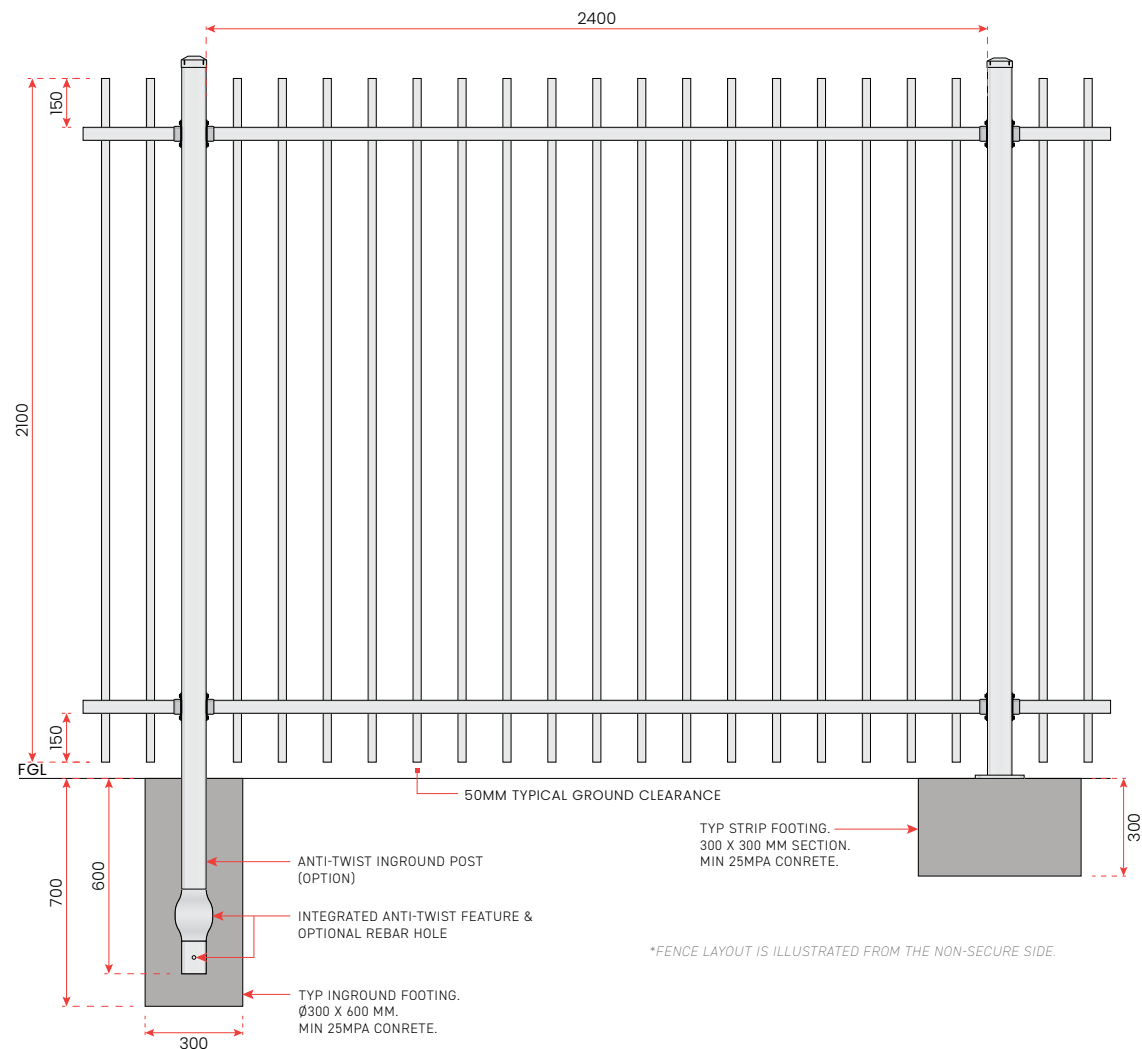

INGROUND POST ANTI-TWIST FEATURE

Inground post stamped at bottom, forming a widened section to prevent twisting

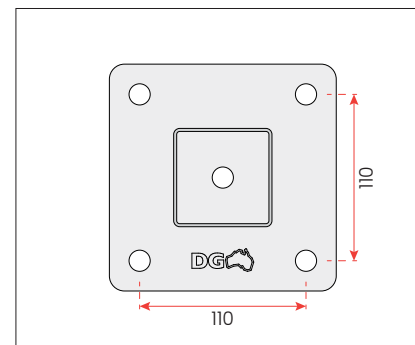

BASE PLATE DETAILS

150 X 150 base plate with Ø14mm holes in 110 x 110 hole pattern



FIXING DETAILS

4x FB4040-2H Brackets per panel, 2x TEK121420 Screws per bracket